









### **SOLID COLOURS**



(ES1405)

(ES1545)

Ultramarine Blue 5002 (ES1512)

(ES1519)

### **METALLIC COLOURS**



## **TEXTURED FINE COLOURS**



Coils in stock are 1500 mm wide on **larson**° panels coated with PVDF or DG5/HDP paints.

For other widths, check availability - Widths not in stock subject to a minimum order.

The colours in this colour chart are very close to reality. We advise to select the final colour over physical samples.

The colours in this colour chart are very close to reality. We advise to select the final colour over physical samples. The colours shown in this document are matt finishes with a gloss level lower than 40.

### TREND COLOURS IN NORTH AMERICA



Medium Grey Mica (US0975)




Classic Bronze (US0987)




Silversmith (US0999)




Classic Black



Charcoal (US0974)



Bone White (US0984)



RVW White (US0979)



Cadet Grey (US0986)

# **COATING POSSIBILITIES**

### **PVDF**

(Polyvinylidene Fluoride)

Based on PVDF resins with extraordinary performance. Nominal paint thicknesses:

#### a) PVDF 2L Coastal: approx.31µ

- Gloss from 20G to 40G.
- Excellent colour stability, minimal chalking and very good chemical resistance.
- Extraordinary protection against weathering, radiation and atmospheric contaminants.
- Outstanding flexibility when profiled, folded and coiled.

### DG5

(High Durable Polyester)

Based on HDP resins with nominal paint thicknesses (depending on the colour):

- a) DG5 2L Coastal: approx. 35µ. a) DG5 3L Coastal: approx. 55µ. a) DG5 2L: approx. 25µ.
- Gloss from 10G to 90G.
- Excellent protection against weathering, UV radiation, and atmospheric contaminants.
- Outstanding hardness and flexibility when profiled, folded, and coiled.

# fluorlac

(Feve LUMIFLON™2 layers)

Based on fluoropolymer resins with a nominal thickness of 30µ (depending on the colour).


- RAL & NCS colour chart available in matte, satin, and gloss finishes.
- Possibility of matching specific colours.
- Very small quantities available, orders starting from 75 m<sup>2</sup> with immediate delivery within 2-3 weeks
- Excellent weather resistance and chemical durability.
- Outstanding resistance to abrasion.

This catalogue provides general information on **Alucoil** and their products. Despite having verified all of the information contained in this catalogue, **Alucoil** does not accept any liability for any errors or printing failures that may lead to material damage, inaccuracies or misunderstandings. All of its contents are for informational purposes only and can be confirmed directly with the company itself.

**Alucoil** reserves the right to update, modify, edit or remove any content without prior notice. The information contained in this document is for guidance purposes only and may undergo changes. **Alucoil** accepts no responsibility for the use of this catalogue, which, in any event, is aimed at people with technical training, and is subject to their responsibility and criterion. Any unauthorised reproduction, distribution, public communication and/or transformation of this document will be an infringement of intellectual property law.





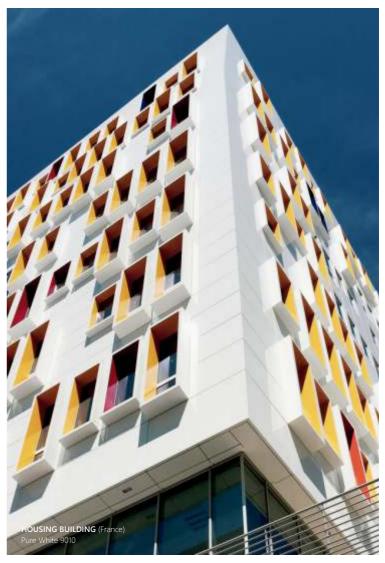



**Alucoil** offers a website where customers and architects can browse a large selection of completed projects. **www.alucoildesign.com** 







Polígono Industrial de Bayas Calle Ircio, Parcelas R68 - R74 09200 Miranda de Ebro (SPAIN) +34 947 333 320 info@alucoil.com